


# Axial Lead Fuses

## Very Fast Acting



### Mechanical Dimensions

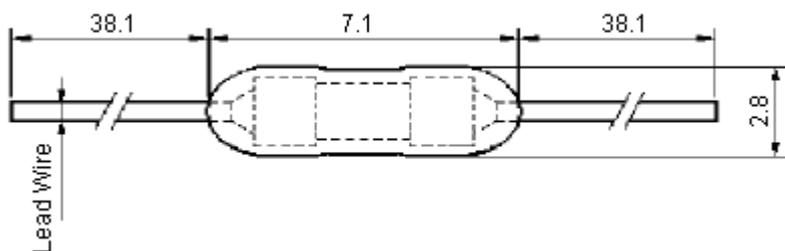

Dimensions : Millimetres

### Electrical Characteristics

Rated Current	1In	2In
	Minimum	Maximum
0.1A to 7A	4 Hours	1 Seconds
7.1A to 10A		3 Seconds
10.1A to 15A		10 Seconds

### Interrupting Ratings

- 0.1A to 10A : 50 amperes at 125V ac  
300 amperes at 125V dc.
- 10.1A to 15A : 50 amperes at 32V ac  
300 amperes at 32V dc.

### Environmental Specifications:

- Operating Temperature : -55°C to +125°C.
- Shock : MIL-STD-202, Method 213, Condition 1 (100G's Peak for 6 Milliseconds).
- Vibration : MIL-STD-202, Method 201 (10-55Hz); Method 204, Test Condition C (55-200Hz at 10G's Peak).
- Moisture Resistance : MIL-STD-202, Method 106.

### Physical Specifications:

#### Materials:

- Encapsulated, Epoxy-Coated Body and Solder Coated Copper Wire Leads.
- Lead Wire : Diameter : 0.64mm (10A and Less)  
Diameter : 0.8mm (12A and 15A).

